


DRAGA 3000 JET SUCTION DREDGER



INNOVATIVE – SUSTAINABLE – ROBUST

- **Electric-driven:** lowest cost per cubic meter. No emission, minimal noise pollution.
- In-house **iPump®** line: developed through sixty years of experience in sand- and gravel extraction. Wear resistant for increased life span, optimal suction characteristics, adaptable for a wide range of tasks.
- In-house **iDredge® control- and automation system:** ensuring increased efficiency and reduced power consumption. Optional: remote controlled dredge systems and data collection for automated analyses on performance.
- **Designed** for easy and low-cost inland transportation to remote locations. Relocation facilitated through the iPlug-and-Dredge Concept. **Modular** design for industry-leading delivery times and continuous **availability of spare parts.**

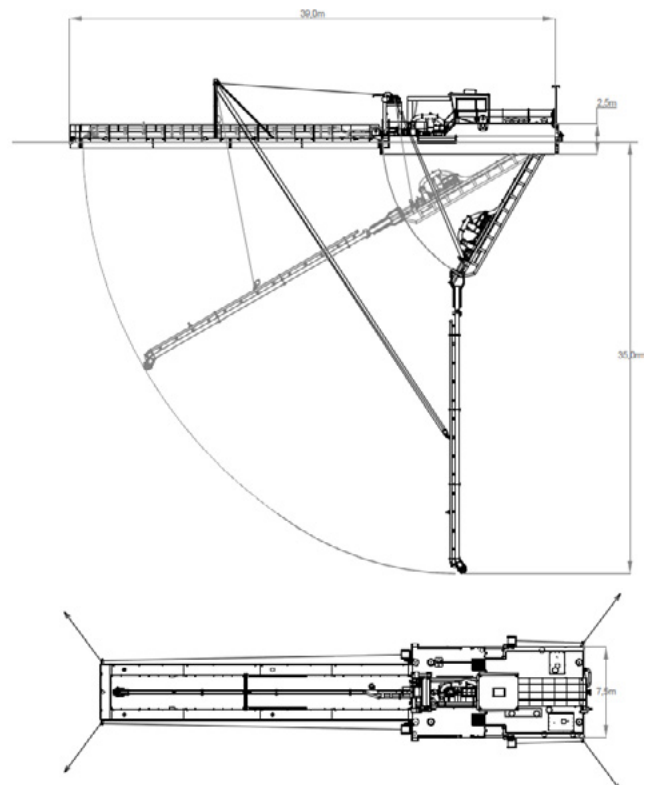

DRAGA 3000 JET SUCTION DREDGER

TECHNICAL SPECIFICATIONS

FEATURES

- Transportable by Road
- Efficient Electric Drive System
- Small Environmental Footprint
- Low Noise & Vibration Level
- One-man Operation

DREDGING FEATURES

| | | |
|--------------------------------------|-----------------------|---------------------|
| Max. Dredging Depth: | 35 | [m] |
| Nominal Mixture Flow: | 900 – 2400 | [m ³ /h] |
| Available Suction Diameter: | 300 – 400 | [mm] |
| Available Discharge Diameter: | 250 – 400 | [mm] |
| Available Dredge Pump Sizes: | 250 / 300 / 350 / 400 | [mm] |
| Min. Spherical Pump Passage: | 160 | [mm] |

DREDGE PUMP DRIVE

| | |
|-------------------------------------|----------------------|
| Power Source: | Electric feed cable |
| Pump Drive: | Submersible Motor |
| Available Dredge Pump Power: | 315 / 400 / 500 [kW] |

JET PUMP

| | | |
|---------------------------|-----------|---------------------|
| Jet Pump Flow: | 300 / 400 | [m ³ /h] |
| Jet Pump Pressure: | 8 | [bar] |
| No. Jet Nozzles: | 8 | [pcs] |

PRINCIPLE DIMENSIONS

| | | |
|--|----------------|-------|
| Length o.a. with raised ladder: | 39 | [m] |
| Length over pontoons: | 39 | [m] |
| Width: | 7,5 | [m] |
| Depth: | 2.5 / 1.5 | [m] |
| Draught: | 0.7 | [m] |
| Main Pontoons LxWxH: | 18 x 2.5 x 2.5 | [m] |
| Total dry weight: | 72 | [ton] |
| Air draught: | 5.1 | [m] |

ELECTRIC INSTALLATION

| | | |
|-------------------------------------|--------------------|-------|
| Primary Voltage: | 6 / 10 | [kV] |
| Secondary Voltage (3-Phase): | 400 | [Vac] |
| Dredge Pump Power Source: | VFD | |
| Jet Pump Power Source: | Soft starter / VFD | |
| Mooring Winches: | DOL starter | |

DECK INSTALLATION

| | | |
|--|-----|------|
| Ladder Hoisting Winch (Electric): | 60 | [kN] |
| Suction Tube Hoisting Winch (Electric): | 40 | [kN] |
| Mooring Winches (Electric): | 30 | [kN] |
| Mooring Winch Wire Capacity: | 200 | [m] |

DECK CRANE

| | | |
|--------------------------|-----|------|
| Lifting Capacity: | 15 | [kN] |
| Outreach: | 2.2 | [m] |

TOOLS

- Special tools are supplied for maintenance of dredge pump

INSTRUMENTATION

- **iDredge®** Dredger Control System
- Dredging Depth indication
- Vacuum and Pressure Indication of Dredge Dump

OPTIONAL EQUIPMENT

- DGPS Dredge Mining Control System
- Production Measurement
- Discharge Velocity Measurement
- Additional Hydraulic Excavation Head
- Wedge piece for small min. Dredging depths
- Floating discharge pipe line
- Floating high voltage supply cable
- Remote dredge monitoring
- Gland pump